Salduba bedside cabinet

Quick reference sheet

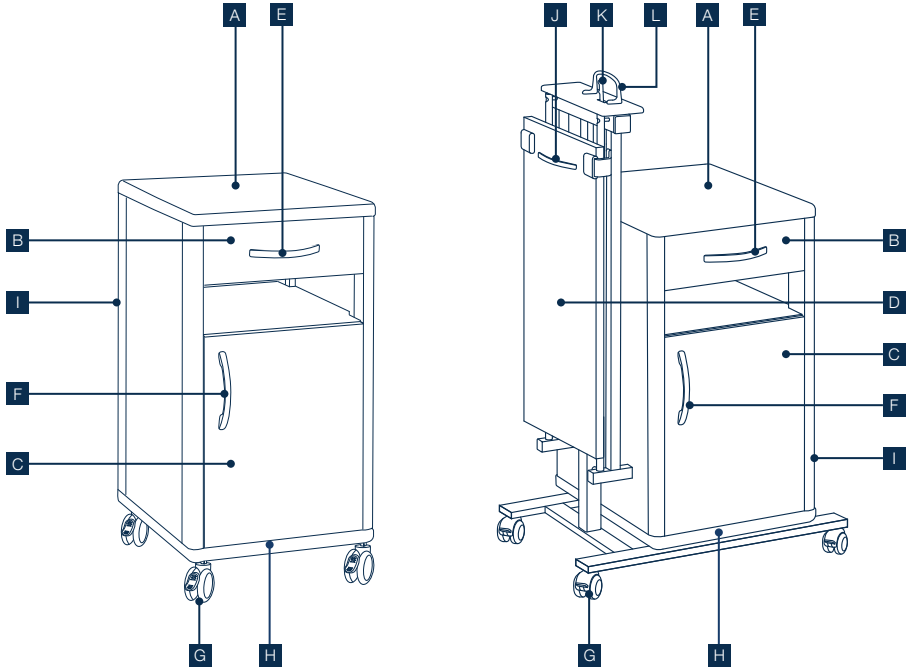

Bedside cabinets components

A	Upper cover	G	Double wheels
B	Drawer	H	Lower cover
C	Door	I	PVC edges
D	Overbed table	J	Board handle
E	Drawer handle	K	Lever
F	Door handle	L	Accessory handle

Other functions of the bedside cabinet

Wheels:

For its transport, the table has four double wheels of Ø 6.5 cm (Ø 5 cm on the bedside cabinet with overbed table) with an individual brake on each of them.

Braking system:

- Activate brake: Press the pedal to its lowest position. When the brake is activated, the wheel will lock (1).
- Deactivate brake: Lift the pedal with your foot until it is in its highest position (2).



Wheels with individual brake



Brake



Free movement

Cleaning

It is recommended to clean the unit using chlorine solutions with a maximum concentration of 1000 mg/l.

Cleaning and disinfection after a patient leaves:

- Overbed table, doors, retaining rods.

Deep cleaning and disinfection every two months:

- The whole bedside cabinet.

Maintenance

Always check the correct state of:

- Wheels.
- Drawers.
- Overbed table mechanism.

For more information, please consult the use and maintenance manual.

www.pardo.es
TECHNICAL SERVICE CENTRE
(+34) 976 300 033

sept 2024 | CódPOO701682_QuickSheet_BedsideCabinet_Salduba_EN_2024

Mechanical operation

Overbed table

Placement:

- Unscrew the wing screw completly, hereafter, place the Salduba bedside cabinet on the accessory fitting in the four holes existent in the structure (1).
- Finally screw the wing screw (2) in the inner of bedside cabinet to get that the set are fix.

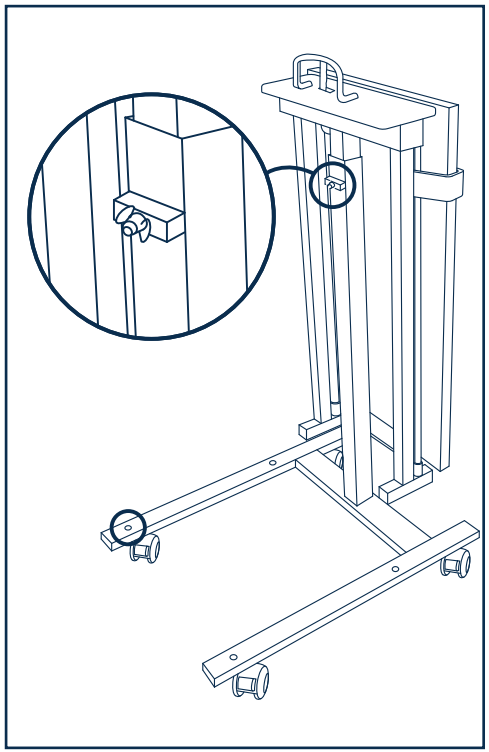

Other mechanical operations

Overbed table placement:

- Pull the board up using the handle.
- Once the overbed table is in its highest position, lower the board to the horizontal position.

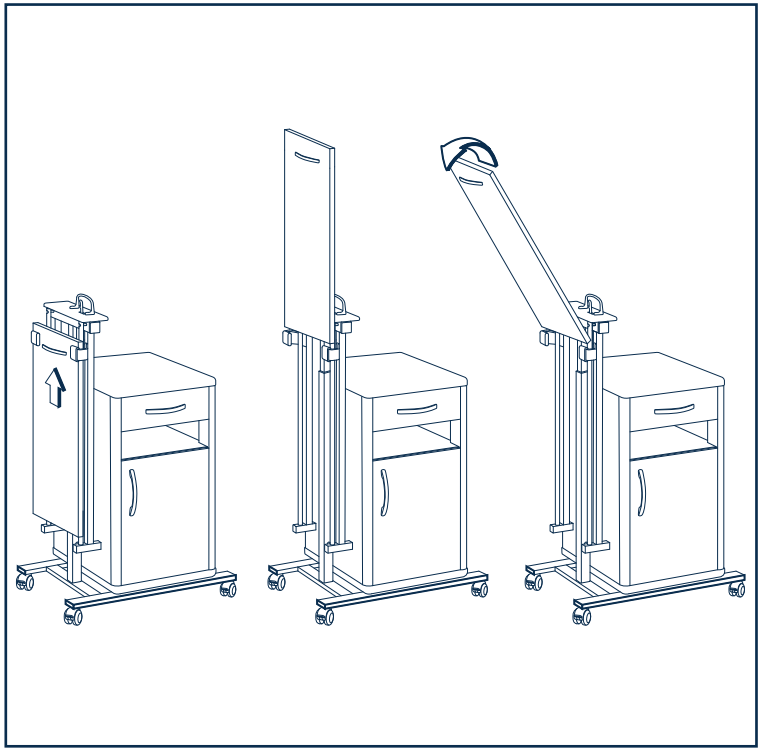

Industrias Hidráulicas Pardo S.L. has the following certificates:

SAFETY WARNINGS

- Handle the leg section carefully when lifting or picking it up in order to avoid crushing your hands.
- Check that there are no materials, parts of the user's body or other person nearby, that could come between the board and the fixed elements.