# Atril Volteable overbed table

## Quick reference sheet

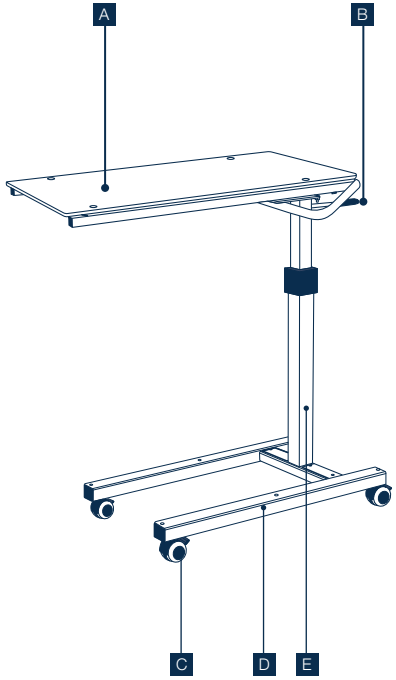


## Overbed table components

| | | | |
|---|---|---|---|
| A | Board | D | U or H base |
| B | Lifting lever | E | Column |
| C | Double wheels Ø 5 cm | | |

## Other functions of the overbed table

Wheels:

For its transport, the table has four double wheels of Ø 5 cm with an individual brake on each of them.

Braking system:

- Activate brake: Press the pedal to its lowest position. When the brake is activated, the wheel will lock (1).
- Deactivate brake: Lift the pedal with your foot until it is in its highest position (2).



Wheels with individual brake




Brake




Free movement

## Cleaning

It is recommended to clean the unit using chlorine solutions with a maximum concentration of 1000 mg/l.

Cleaning and disinfection after a patient leaves:

- Overbed table, handles, levers or lifting wheels.

Deep cleaning and disinfection every two months:

- The whole bedside cabinet.

## Maintenance

Always check the correct state of:

- Wheels.
- Lifting, reclining and rotating mechanism of the overbed table.

For more information, please consult the use and maintenance manual.

www.pardo.es
TECHNICAL SERVICE CENTRE
(+34) 976 300 033

sept 2024 | Cód.POO701664_QuickSheet_OverbedTable_AtrilVolteable_EN_2024

## Mechanical operation

Raising and lowering the overbed tables

Gas lifting

- Pull up the height adjustment lever on the telescopic column of the overbed tables to raise the board.
- Simultaneously, holding the board, position the table at the desired height and release the adjustment lever.
- Release the adjustment lever to set the height.
- To lower the overbed tables, operate the height adjustment lever and gently push the table board to the desired height. Release the height adjustment lever to set the height.

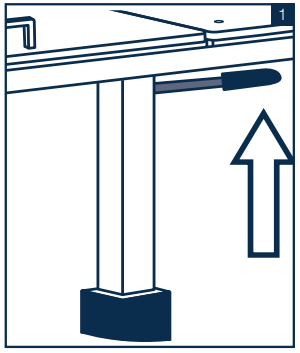


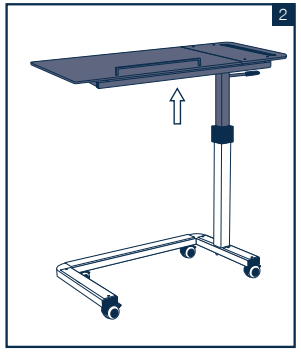


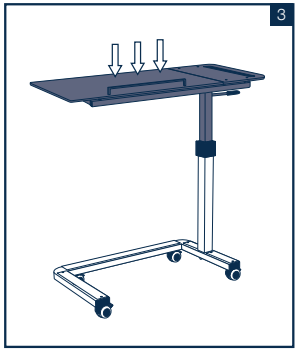


Titling of the board

- To tilt the board, hold the swivelling area from the opposite side to the arc until the required position is reached.
- To return to the horizontal position, tilt the board to the maximum position and then fold it down to the horizontal position.

Board orientation:

- Tilt the board to the maximum position.
- Loosen the handle on the frame.
- Turn the board to the side opposite to that on which the board is positioned.
- Fitting it into the frame.
- Tighten the handle and position the board horizontally.

Flip the board:

- For flipping, hold the board from the underside of the board and lift/rotate the board towards the outside of the structure.
- With the board positioned outside the base of the overbed table.

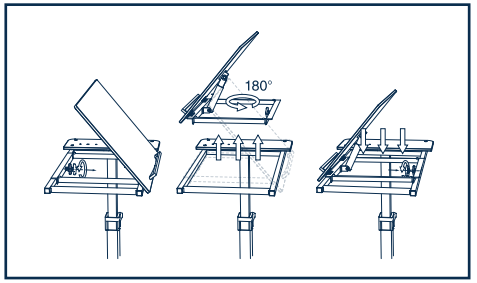


Board orientation

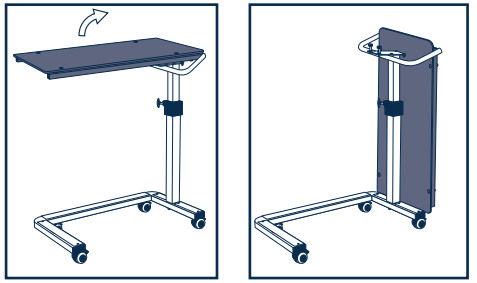

Flipping of the borad

## Other functions of the overbed table

The base of the overbed table can be “U” shaped or “H” shaped.

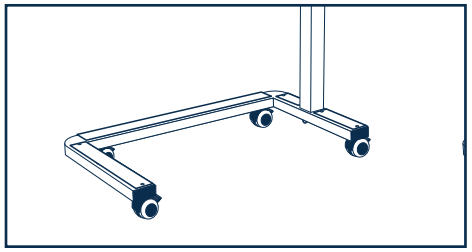

“U” shaped base

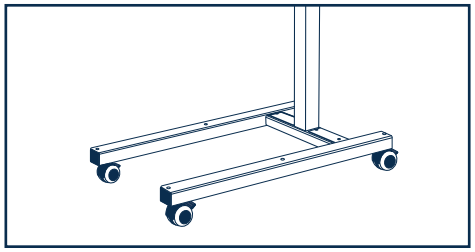

“H” shaped base

Industrias Hidráulicas Pardo S.L. has the following certificates:

SAFETY WARNINGS

- Handle the leg section carefully when lifting or picking it up in order to avoid crushing your hands.
- Check that there are no materials, parts of the user’s body or other person nearby, that could come between the board and the fixed elements.